

GTS

Mini magnetic sludge remover filter



Multi-position mini sludge remover filter: it is suitable for installation in very limited spaces (less than 6 cm inter-axis and 15 cm height) under the condensing boilers.


It can be installed vertically (suggested) or horizontally.

Equipped with a magnetic system useful to block the ferrous residuals in water: eventual copper and aluminum are filtered by the 500 microns cartridge.


Suitable for hot water up to 90 °C. ideal for boilers up to 28 Kw.

Neodymium magnets 11.000 Gauss.

CODE	MODEL	MATERIAL			FLOW RATE ($\Delta P=0,2\text{BAR}$)	PN	CONNECTIONS	DIMENSIONS in mm		FILTERING CAPACITY	MAX WATER TEMP.	PCS
		HEAD	VESSEL	CARTRIDGE				A	B			
GTSMAG01	GTS	Termopl	Termopl	Inox	25 Lt/minute	7 BAR	3/4" M-F	75	135	500	90	12 BOX

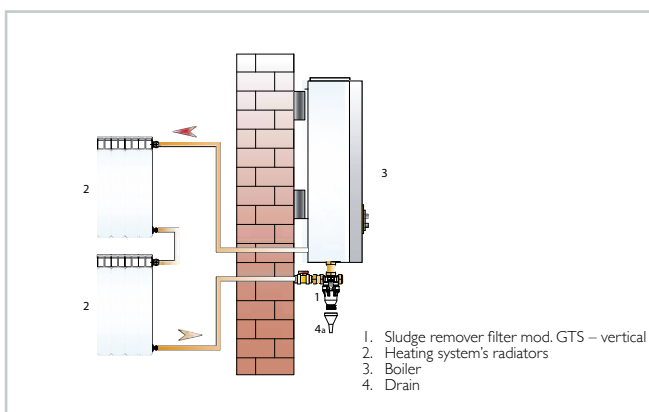

SCHEMA 1

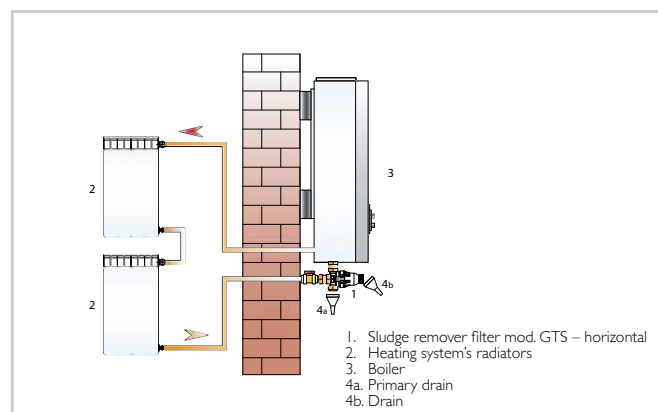

SCHEMA 2