


Fixed Speed  
Cooling only

# MFH ON/OFF PORTABLE

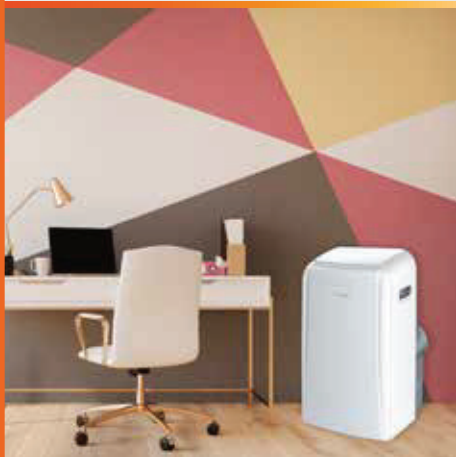

## + PRODUCTS

- No fluid handling.
- Economic.
- R290 refrigerant with very low environmental impact.



RC08C  
(included)

## FEATURES

### TECHNOLOGY:



### AIR QUALITY/CLEAN:



### USER FUNCTIONS:



### INSTALLER FUNCTIONS:



- Comfort "I Feel": temperature sensor in the remote control RC08C.
- Mobile air conditioning: unit on swivel castors and side handles.
- Control screen on the unit.
- Installation kit for windows and walls as standard.
- Condensates reduction: evaporation on the exchanger.



## MFH TECHNICAL DATA

| Indoor unit                            |       | AW-MFH009-C41    | AW-MFH012-C41 |
|--|-------|------------------|---------------|
| Phase                                  |       | Single phase     | Single phase  |
| <b>COOLING</b>                         |       |                  |               |
| Rated power                            | kW    | 2.93             | 3.52          |
| Rated power input                      | kW    | 0.945            | 1.357         |
| Current                                | A     | 4.5              | 5.9           |
| EER/Energy label                       |       | 3.10/A+          | 2.60/A        |
| Operating limits                       | °C    | 17°/35° Dry bulb |               |
| <b>INDOOR UNIT</b>                     |       |                  |               |
| Type                                   |       | Monobloc         | Monobloc      |
| Sound pressure level to 1 m (LS/MS/HS) | dB(A) | 50/51/52         | 50/51/52      |
| Sound power Level                      | dB(A) | 56               | 63            |
| Airflow (LS/MS/HS)                     | m³/h  | 355/370/420      | 355/370/420   |
| Diameter flexible emission duct        | mm    | 150              |               |
| Length range of heat emission duct     | m     | 0.50 - 1.5       |               |
| Dehumidification                       | l/h   | 1.6              | 1.8           |
| Outline dimensions (WxHxD)             | mm    | 467x765x397      | 467x765x397   |
| Package dimensions (WxHxD)             | mm    | 515x890x440      | 515x890x440   |
| Net weight/Gross weight                | kg    | 31.8/35.7        | 33/36.5       |
| Part number                            |       | 7MB021060        | 7MB021061     |
| <b>POWER SUPPLY</b>                    |       |                  |               |
| Phase/Tension/Frequency                |       | 1P/230V/50Hz     | 1P/230V/50Hz  |
| <b>PIPE LINE</b>                       |       |                  |               |
| Refrigerant/GWP                        |       | R290/20          | R290/20       |
| Charge                                 | kg    | 0.21             | 0.22          |

\* Packing 8 pieces minimum